


TYPE 31 TORQUE REQUIREMENTS:
 3/16" DIA. = 35 TO 40 IN. LBS.
 1/4" DIA. = 70 TO 80 IN. LBS.
 3/8" DIA. = 200 TO 220 IN. LBS.
 1/2" DIA. = 400 IN. LBS

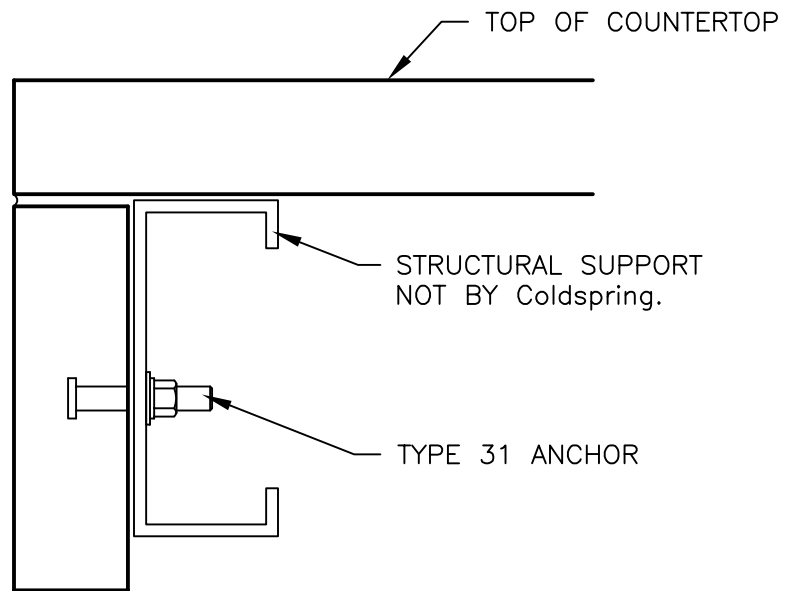


APRON SECTION

CONSIDERATIONS:

- PIECE SIZE
 - KEEP APRON AND SPLASH LENGTHS FROM GETTING TOO LONG WHERE BREAKAGE IN FABRICATION, SHIPPING, AND INSTALLATION BECOME A PROBLEM.
- JOINT SIZE
 - CHECK BID QUALIFICATIONS
 - TIGHT JOINTS, 1/16" JOINTS, 1/8" JOINTS (PREFERRED), 1/4" JOINTS.
- FRONT EDGE OF VANITY
 - FOLLOW CONTRACT DOCUMENTS
 - STANDARD BLUNT EDGE, RADIUS EDGE, AND BEVELED EDGE.

HOLD SIDE SPLASH LENGTH BACK FROM FRONT EDGE OF VANITY TOP. SIDE SPLASH DOES NOT NEED TO FOLLOW VANITY PROFILE.

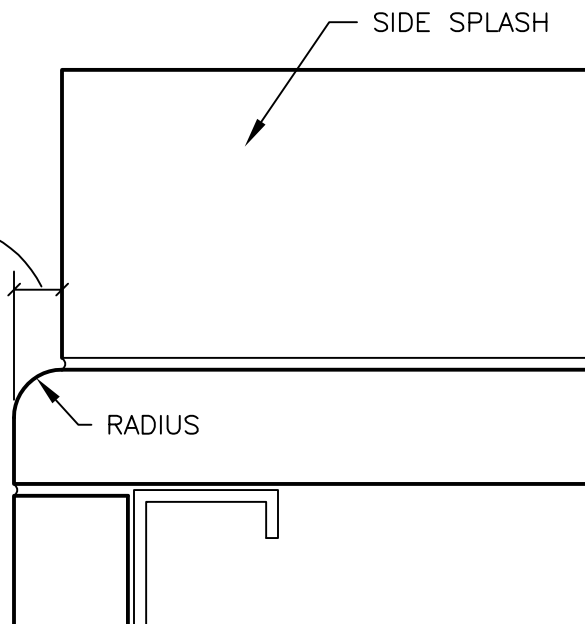

SIDE SPLASH/FRONT EDGE OF VANITY

DESCRIPTION:

VANITY APRON AND SIDE SPLASH



COLDSRING™

17482 GRANITE WEST ROAD, COLD SPRING, MN 56320-4578
 PHONE (320) 685-3621, FAX (320) 685-5052
 WWW.COLDSRINGUSA.COM

SCALE:

6" = 1'-0"

DRAWN BY:

LB/KM

DATE:

4-6-2020